



DMP 331

Industrial Pressure Transmitter for Low Pressure

Stainless Steel Sensor

accuracy according to IEC 60770:
 standard: 0.35 % FSO
 option: 0.25 / 0.1 % FSO

Industrial Pressure Transmitter

DMP 331

Nominal pressure

from 0 ... 100 mbar
 up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA
 3-wire: 0 ... 20 mA / 0 ... 10 V
 others on request

Special characteristics

- ▶ perfect thermal behaviour
- ▶ excellent long term stability
- ▶ **pressure port**
G 1/2" flush from 100 mbar on

Optional versions

- ▶ IS-version
 Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2
 according to IEC 61508 / IEC 61511
- ▶ **pressure sensor welded**
- ▶ customer specific versions

The pressure transmitter DMP 331 can be used in all industrial areas when the medium is compatible with stainless steel 1.4404 (316 L) or 1.4435 (316 L). Additional are different elastomer seals as well as a helium tested welded version available.

The modulare concept of the device allows to combine different stainless steel sensors and electronic modules with a variety of electrical and mechanical versions.

Thus a diversity of variations is created, meeting almost all requirements in industrial applications.

Preferred areas of use are



Plant and Machine Engineering



Environmental Engineering
 (water - sewage - recycling)



Energy Industry



DMP 331

Industrial Pressure Transmitter

Technical Data

Miscellaneous					
Option SIL 2	according to IEC 61508 / IEC 61511				
Current consumption	signal output current: max. 25 mA		signal output voltage: max. 5 mA		
Weight	approx. 140 g				
Installation position	any ³				
Operational life	> 100 x 10 ⁶ pressure cycles				
CE-conformity	EMC Directive: 2004/108/EC				
³ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.					
Wiring diagrams					
2-wire-system (current) 			3-wire-system (current / voltage) 		
Pin configuration					
Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (for 3-wire)	3	1	3	OUT+	gn (green)
Shield	ground pin	5	4	⊥	gn/ye (green / yellow)
Electrical connections (dimensions in mm)					
standard 		option			
ISO 4400 (IP 65)		Binder Series 723 5-pin (IP 67)		M12x1 4-pin (IP 67)	
				cable outlet with PVC cable (IP 67) ⁴	
		compact field housing (IP 67)		cable outlet, cable with ventilation tube (IP 68) ⁵	
⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request					
⁴ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)					
⁵ different cable types and lengths available, permissible temperature depends on kind of cable					


DMP 331

Industrial Pressure Transmitter

Technical Data


Mechanical connections (dimensions in mm)

standard for accuracy 0.35 / 0.25 %

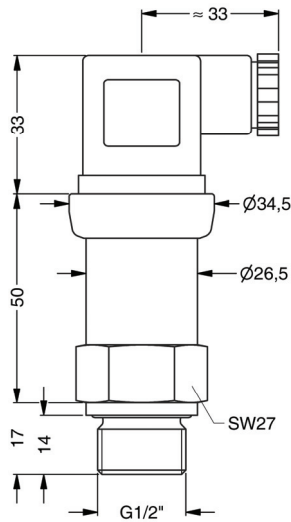


G1/2" DIN 3852
with ISO 4400

standard for accuracy 0.1 %;
SIL- and SIL-IS-version

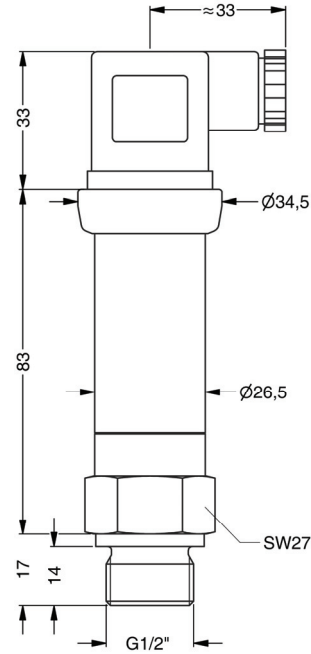


G1/2" DIN 3852
with ISO 4400


option




G1/2" EN 837




G1/2" open port




G1/2" DIN 3852
with flush sensor




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇨ metric threads and other versions on request

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Website

www.SensorsONE.co.uk

Email

enquiries [at] SensorsONE.co.uk

QR Code

Save the SensorsONE website address to your mobile smartphone by scanning this QR code

