

DMP 457

Pressure Transmitter For Shipbuilding And Offshore

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO



Shipbuilding and Offshore

DMP 457

Nominal pressure

from 0 ... 100 mbar
up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ shipping approvals
GL (Germanischer Lloyd) and
DNV (Det Norske Veritas)
- ▶ **flush pressure port
G 1/2" from 100 mbar**
- ▶ excellent
thermal characteristic

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for
gases and dusts
- ▶ **welded pressure port**

The pressure transmitter DMP 457 has been especially designed for rough conditions occurring especially in shipbuilding and offshore applications. All gaseous and liquid media, which are compatible with stainless steel 1.4404 (316L) respectively can be used.

Sensor element is a piezoresistive stainless steel sensor with high accuracy and excellent long-term stability. In order to meet the special requirements for shipbuilding and offshore applications extensive tests had to be passed to get the Germanischer Lloyd (GL) and Det Norske Veritas (DNV) approvals.

A variety of standard output signals as well as mechanical and electrical connections make the DMP 457 covering a wide field of applications.

Preferred areas of use are

Shipbuilding and Offshore



Diesel Engines
Drives
Compressors
Pumps
Boiler
Hydraulic and Pneumatic
Control Systems



Fuel and Oil



Input pressure range												
Nominal pressure gauge [bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	
Nominal pressure abs. [bar]	-	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	
Level gauge / abs. [mH ₂ O]	-	1	1.6	2.5	4	6	10	16	25	40	60	
Overpressure [bar]	5	0.5	1	1	2	5	5	10	10	20	40	
Burst pressure ≥ [bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	
Nominal pressure gauge ¹ [bar]	10	16	25	40	60	100	160	250	400	600		
Nominal pressure abs. [bar]	10	16	25	40	60	100	160	250	400	600		
Level gauge / abs. [mH ₂ O]	100	160	250	400	-	-	-	-	-	-	-	
Overpressure [bar]	40	80	80	105	210	600	600	1000	1000	1000		
Burst pressure ≥ [bar]	50	120	120	210	420	1000	1000	1250	-	-		
Vacuum resistance	P _N ≥ 1 bar: unlimited vacuum resistance P _N < 1 bar: on request											
¹ from 60 bar: measurement starts with ambient pressure												
Output signal / Supply												
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}											
Option IS-protection	2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}											
Performance												
Accuracy ²	Standard: Nominal pressure < 0.4 bar: ≤ ± 0.5 % FSO Nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO Option: Nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO											
Permissible load	R _{max} = [(V _S - V _{S min}) / 0.02] Ω											
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ											
Long term stability	≤ ± 0.1 % FSO / year by reference conditions											
Response time	< 10 msec											
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)												
Thermal effects (Offset and Span) / Permissible temperatures												
Nominal pressure P _N [bar]	-1 ... 0			< 0.4				≥ 0.40				
Tolerance band [% FSO]	≤ ± 0.75			≤ ± 1				≤ ± 0.75				
in compensated range [°C]	-20 ... 85			0 ... 70				-20 ... 85				
Permissible temperatures	medium: -40 ... 125°C			electronics / environment: -40 ... 85°C				storage: -40 ... 100°C				
Electrical protection												
Short-circuit protection	permanent											
Reverse polarity protection	no damage, but also no function											
Electromagnetic compatibility	emission and immunity according to - EN 61326 - Germanischer Lloyd (GL) - Det Norske Veritas (DNV)											
Mechanical stability												
Vibration	4 g (according to GL: curve 2 / according to DNV: Class B / basis: IEC 60068-2-6)											
Materials												
Pressure port	stainless steel 1.4404 (316L)											
Housing	standard: stainless steel 1.4404 (316L) option field housing: stainless steel 1.4404 (316L), with cable gland											
Cable sheath	for cable outlet			for submersible version				permissible temperatures				
	PVC - cable PUR - cable			PVC - probe cable PUR - probe cable FEP - probe cable TPE - probe cable				-5 ... 70 °C -25 ... 70 °C -25 ... 70 °C -25 ... 125 °C				
Seals (media wetted)	standard: FKM option: NBR welded version ³ others on request											
Diaphragm	stainless steel 1.4435 (316L)											
Media wetted parts	pressure port, seals, diaphragm											
³ welded version only with pressure ports according to EN 837; possible for nominal pressure ranges P _N ≤ 40 bar												
IS-protection												
Approval DX 19-DMP 457	IBExU10ATEX1068X			zone 0: II 1G Ex ia IIB T4 Ga				zone 20: II 1D Ex ia D 20 T85 °C				
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i = 105 nF, L _i = 5 μH											
Permissible temperatures for environment	in zone 0: -20 ... 60 °C bei p _{atm} 0.8 bar bis 1.1 bar in zone 1 or higher: -25 ... 70 °C											
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m											


Miscellaneous	
Current consumption	max. 25 mA
Weight	approx. 140 g (with ISO 4400)
Installation position	any ⁴
Operational life	> 100 x 10 ⁶ pressure cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) ⁵
ATEX-directive	94/9/EC

⁴ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.

⁵ This directive is only valid for devices with maximum permissible overpressure > 200 bar

Wiring diagram


2-wire-system (current)

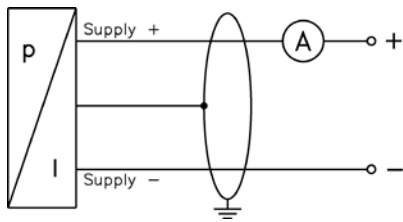

Pin configuration

Electrical connection	ISO 4400	field housing	cable colours (DIN 47100)
Supply +	1	IN +	WH (white)
Supply -	2	IN -	BN (brown)
Shield	ground pin	\perp	GNYE (green / yellow)

Electrical connections ⁶ (dimensions in mm)

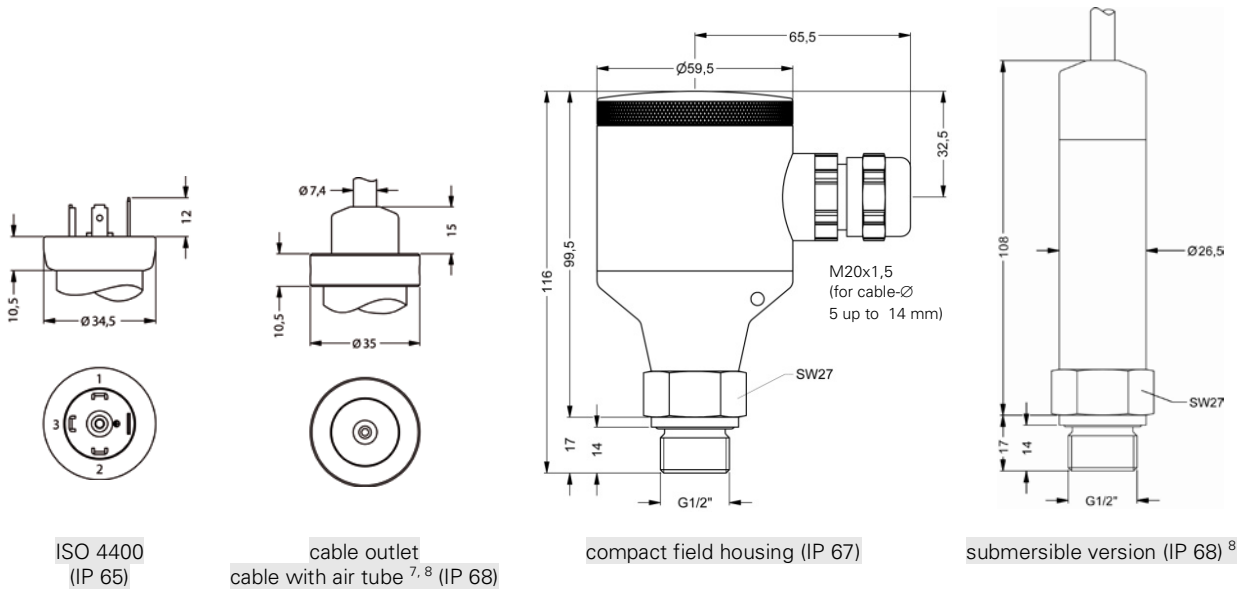


⁶ Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

⁷ tested at 4 bar or 40 mH₂O for 24 hours

⁸ different cable types and lengths available, permissible temperature depends on kind of cable, see cable connection

Mechanical connection (dimensions in mm)


Standard

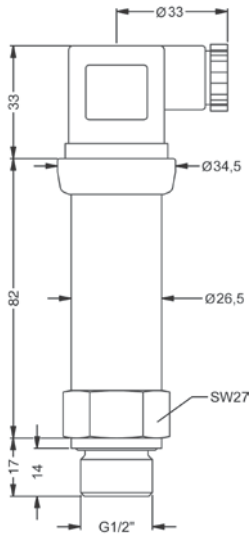


G1/2" DIN 3852

⇒ for nominal pressure $P_N > 400$ bar increases the length of devices with IS-vesion by 19 mm and of devices without IS-version by 39 mm


Option




G1/2" EN 837




G1/4" DIN 3852




G1/4" EN 837




1/2" NPT



1/4" NPT

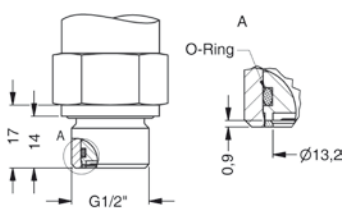

G1/2" flush DIN 3852
(up to 40 bar)



G1/2" open port DIN 3852
(up to 40 bar)

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DMP 457

DMP 457



Pressure									
	in bar, gauge ¹	6	0	0					
	in bar, absolute	6	0	1					
	in mH ₂ O, gauge ¹	6	0	2					
	in mH ₂ O, absolute	6	0	3					
Input									
	[mH ₂ O]	[bar]							
	1	0.1	1	0	0	0			
	1.6	0.16	1	6	0	0			
	2.5	0.25	2	5	0	0			
	4	0.4	4	0	0	0			
	6	0.6	6	0	0	0			
	10	1	1	0	0	1			
	16	1.6	1	6	0	1			
	25	2.5	2	5	0	1			
	40	4	4	0	0	1			
	60	6	6	0	0	1			
	100	10	1	0	0	2			
	160	16	1	6	0	2			
	250	25	2	5	0	2			
	400	40	4	0	0	2			
	60		6	0	0	2			
	100		1	0	0	3			
	160		1	6	0	3			
	250		2	5	0	3			
	400		4	0	0	3			
	600		6	0	0	3			
	-1 ... 0		X	1	0	2			
	customer		9	9	9	9			consult
Output									
	4 ... 20 mA / 2-wire					1			
	Intrinsic safety 4 ... 20 mA / 2-wire					E			
	customer					9			consult
Accuracy									
	standard for P _N ≥ 0,4 bar	0.35 %				3			
	standard for P _N < 0,4 bar	0.50 %				5			
	option for P _N ≥ 0,4 bar	0.25 %				2			
	customer					9			consult
Electrical connection									
	Male and female plug ISO 4400 ²					G	1	0	
	(for cable Ø 4...6 mm)								
	Male and female plug ISO 4400 GL ^{2,3}					G	0	0	
	(for cable Ø 10...14 mm)								
	Male and female plug ISO 4400 GL ^{2,3}					G	0	1	
	(for cable Ø 4,5...11 mm)								
	Cable outlet ^{2,4}					T	R	0	
	Field housing stainless steel					8	8	0	
	Submersible version (1.4404 / 316L)					T	T	0	
	customer					9	9	9	consult
Mechanical connection									
	G1/2" DIN 3852					1	0	0	
	G1/2" EN 837					2	0	0	
	G1/4" DIN 3852					3	0	0	
	G1/4" EN 837					4	0	0	
	G 1/2" DIN 3852 with ⁵					F	0	0	
	flush sensor								
	G1/2" DIN 3852 open pressure port ⁵					H	0	0	
	1/2" NPT					N	0	0	
	1/4" NPT					N	4	0	
	customer					9	9	9	consult
Seals									
	FKM							1	
	NBR							5	
	without (welded version) ⁶							2	
	customer							9	consult
Special version									
	standard						0	0	0
	customer						9	9	9

¹ from 60 bar: measurement starts with ambient pressure

² Shielded cable has to be used! Cable versions are delivered with shielded cable.

³ female plug is GL-approved

⁴ different cable types and lengths deliverable

⁵ possible up to 40 bar

⁶ welded version only with pressure ports according to EN 837; possible with pressure ranges P_N ≤ 40 bar

Website

www.SensorsONE.co.uk

Email

enquiries [at] SensorsONE.co.uk

QR Code

Save the SensorsONE website address to your mobile smartphone by scanning this QR code

